

# FLOODED HIGH TEMPERATURE BATTERY

80E41RHT (12V85Ah)



## CHARACTERISTICS



Item	Specifications
Nominal Voltage	12V
Nominal Capacity (20HR)	85Ah
Reserve Capacity	148min
Cold Cranking Amps@0°F (-18°C)	570A
Dimension	Length
	408mm(16.1inches)
	Width
Height	170mm(6.69inches)
	233mm(9.17inches)
Approx Weight	23.9kg(52.7lbs)
Terminal	1
Cell layout	1
Hold-Down	B0
Case	Black-PP Material
Cover	Black-PP Material
Handle	TS8

## APPLICATIONS

- Car start
- EV/HEV
- Engine start

## GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

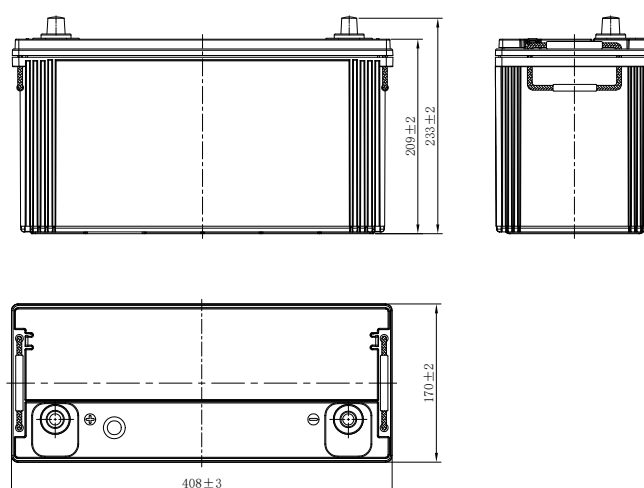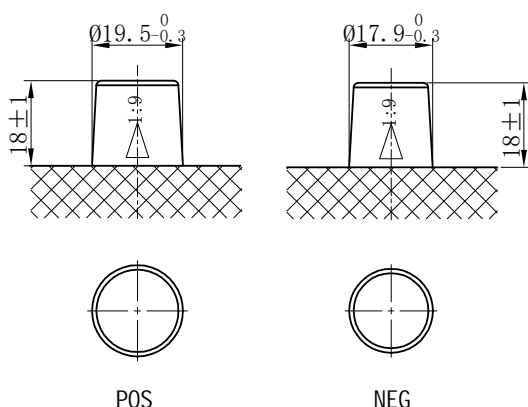

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.

[www.leoch.com](http://www.leoch.com)

Leoch Batteries Pte Ltd

[www.leoch.sg](http://www.leoch.sg)

Leoch Battery Corporation

[www.leochamericas.com](http://www.leochamericas.com)

Leoch Europe S.A.

[www.leoch.eu](http://www.leoch.eu)

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.  
© LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.: LB-80E41RHT-PD-EN-V1.0-20250220