

# FLOODED HIGH TEMPERATURE BATTERY

95F51RHT (12V100Ah)



## CHARACTERISTICS



Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (20HR)	100Ah	
Reserve Capacity	179min	
Cold Cranking Amps@0°F (-18°C)	650A	
Dimension	Length	504mm (19.8inches)
	Width	183.5mm (7.22inches)
	Container Height	200mm (7.87inches)
	Total Height (with Terminal)	223mm (8.78inches)
Approx Weight	31.4kg (69.2lbs)	
Terminal	1	
Cell layout	3	
Hold-Down	B0	
Case	Black-PP Material	
Cover	Black-PP Material	
Handle	TS8	

## APPLICATIONS

- Car start
- EV/HEV
- Engine start

## GENERAL FEATURES

- Design for high temperature countries and regions
- Superior life in high temperature environment
- High tin alloy and thicker positive grid
- High-temp paste
- Patented venting system bring less water loss and prevent acid leakage

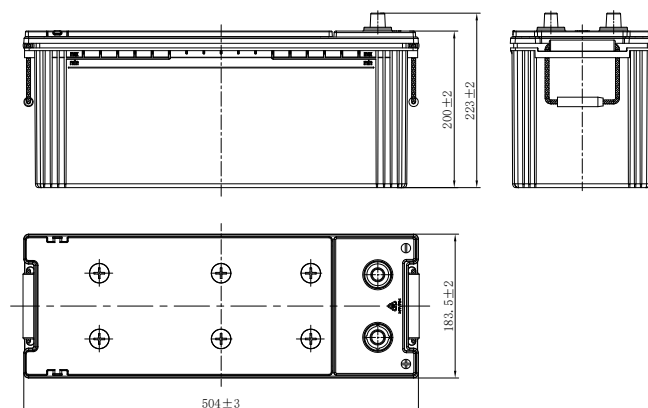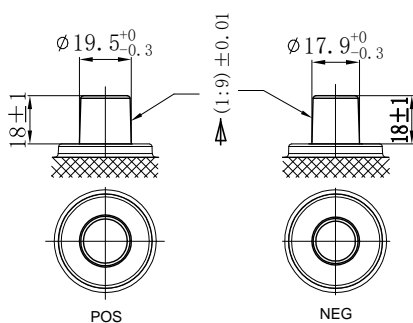

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

Leoch International Technology Ltd.  
www.leoch.com

Leoch Batteries Pte Ltd  
www.leoch.sg

Leoch Battery Corporation  
www.leochamericas.com

Leoch Europe S.A.  
www.leoch.eu