
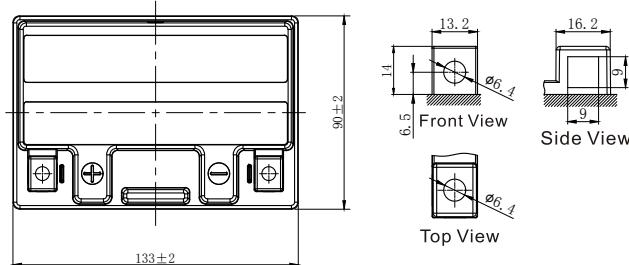


# MAINTENANCE-FREE MOTORCYCLE BATTERY

## EB10-4 (12V10Ah)

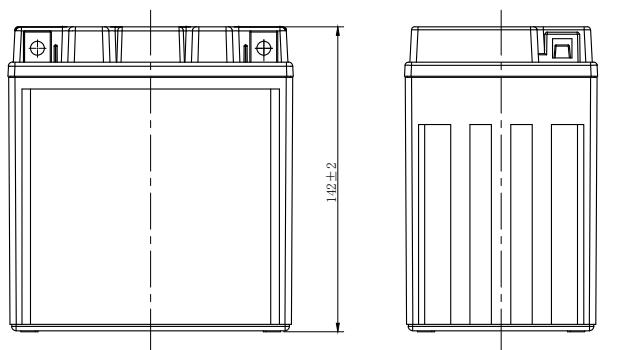

## GENERAL FEATURES


- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

\*Values are subject to variation of +/- 5% in normal manufacturing processes.

## CHARACTERISTICS

Item	Specifications
Nominal Voltage	12V
Nominal Capacity (10HR)	10Ah
Cold Cranking Performance Amps@0°F (-18°C)	120A
Dimension (±2mm)	<p>Length 133mm (5.24inches)</p> <p>Width 90mm (3.54inches)</p> <p>Container Height 142mm (5.59inches)</p> <p>Total Height 142mm (5.59inches)</p>
Battery (with acid)	Approx Weight 3.68kg (8.11lbs)
Terminal type	A
Battery type	Factory Activated Series
Constant-Voltage Charge:	
Initial charging current Less than 0.3C <sub>10</sub>	
Full Charge	<p>Voltage 14.40V~15.00V at 25°C (77°F)</p> <p>Charging time 15~18h</p>
Constant-Current Charge:	
Charging current 0.1C <sub>10</sub> , when charging voltage up to 14.40V, continue to charge 4h	
Floating Charge	<p>Initial charging current Unlimited</p> <p>Voltage 13.50V~13.80V at 25°C (77°F)</p>
40°C (104°F) 106%	
Capacity affected by Temperature	<p>25°C (77°F) 100%</p> <p>0°C (32°F) 86%</p> <p>-15°C (5°F) 65%</p>

## Discharge Characteristics (25°C, 77°F)

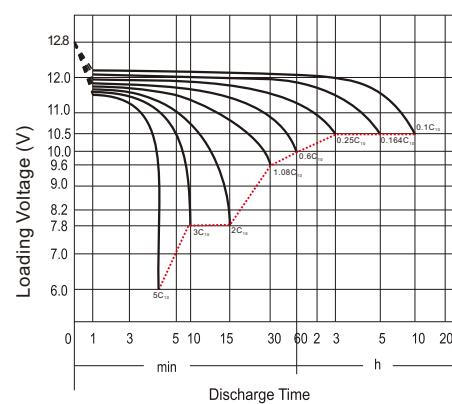

Leoch International Technology Ltd.

[www.leoch.com](http://www.leoch.com)

Leoch Batteries Pte Ltd

[www.leoch.sg](http://www.leoch.sg)

Leoch Battery Corporation

[www.leochamericas.com](http://www.leochamericas.com)

Leoch Europe S.A.

[www.leoch.eu](http://www.leoch.eu)